




Jacobian Explicit Method - Differentiation the Forward Kinematics Eqs. (Method No. 1)



Jacobian Matrix - Derivation Methods

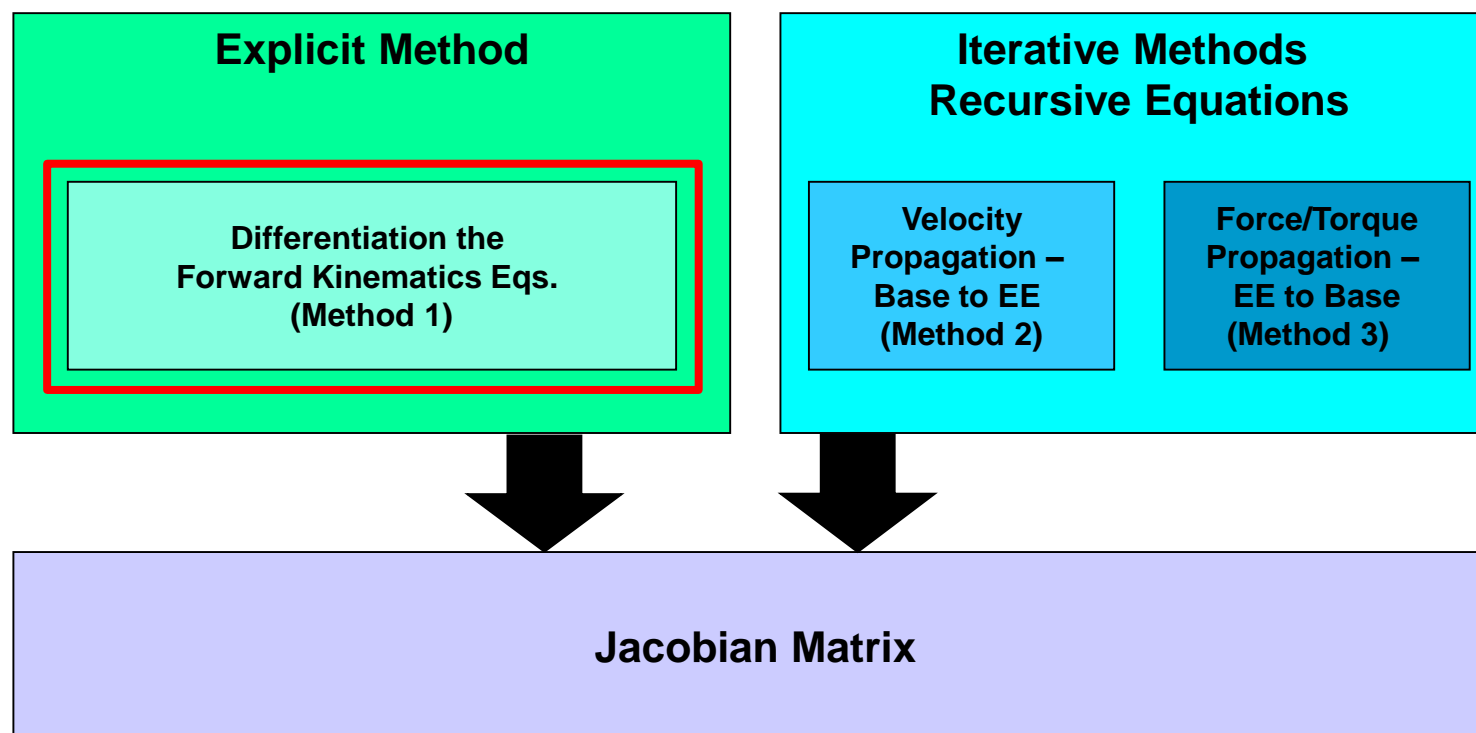



Jacobian – Explicit Form – Overview



$$\begin{bmatrix} {}^0v \\ {}^0\omega \end{bmatrix} = \dot{X} = {}^0J(\theta)\dot{\Theta}$$

$$\begin{bmatrix} {}^0v_x \\ {}^0v_y \\ {}^0v_z \\ {}^0\omega_x \\ {}^0\omega_y \\ {}^0\omega_z \end{bmatrix} = \begin{bmatrix} J_v(\underline{\theta}) \\ J_\omega(\underline{\theta}) \end{bmatrix} \begin{bmatrix} \dot{\theta}_1 \\ \dot{\theta}_2 \\ \dot{\theta}_3 / \dot{d}_3 \\ \dots \\ \dot{\theta}_N \end{bmatrix}$$



Jacobian Matrix

- The meaning of each column (e.g. the first column) of the Jacobian matrix:

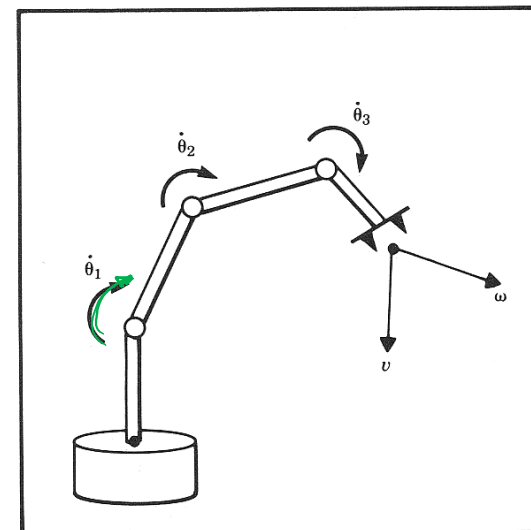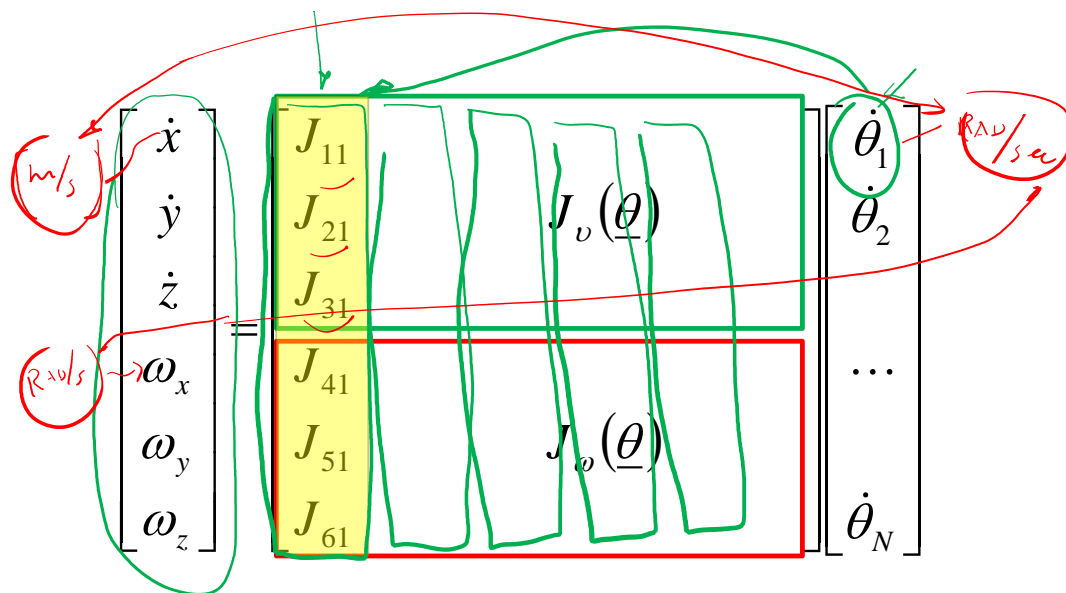

- The first column maps the contribution of the angular velocity of the first joint to the linear and angular velocities of the end effector along all the axis (x,y,z)



Jacobian Explicit Method

Technique



Jacobian – Explicit Form

		i	
$J_v(\underline{\theta})$	Revolute Joint		Prismatic Joint
	$\frac{\partial {}^0P_6}{\partial \theta_i}$ <p>— OR —</p> ${}^0Z_i \times ({}^0P_6 - {}^0P_i)$		$\frac{\partial {}^0P_6}{\partial d_i}$ <p>— OR —</p> 0Z_i
$J_\omega(\underline{\theta})$	$\rho = 1$	$\rho {}^0Z_i$	$\rho = 0$

$${}^0T_i = \begin{bmatrix} * & * & {}^0Z_{ix} & {}^0P_{ix} \\ * & * & {}^0Z_{iy} & {}^0P_{iy} \\ * & * & {}^0Z_{iz} & {}^0P_{iz} \\ \hline 0 & 0 & 0 & 1 \end{bmatrix}$$

$${}^0T_6 = \begin{bmatrix} * & * & * & {}^0P_{6x} \\ * & * & * & {}^0P_{6y} \\ * & * & * & {}^0P_{6z} \\ \hline 0 & 0 & 0 & 1 \end{bmatrix}$$



Jacobian Explicit Method – Rational

Geometric/Analytical Explanation



Jacobian – Explicit Form


$$\begin{bmatrix} J_v(\underline{\theta}) & \begin{matrix} \text{Revolute Joint} \\ \frac{\partial {}^0P_6}{\partial \theta_i} \\ \text{--- OR ---} \\ {}^0Z \times ({}^0P_6 - {}^0P_i) \end{matrix} & \begin{matrix} i \\ \text{Prismatic Joint} \\ \frac{\partial {}^0P_6}{\partial d_i} \\ \text{--- OR ---} \\ {}^0Z \end{matrix} \\ J_\omega(\underline{\theta}) & \begin{matrix} \rho = 1 \\ \rho_i {}^0Z \end{matrix} & \begin{matrix} \rho = 0 \end{matrix} \end{bmatrix}$$

$${}^0T_i = \begin{bmatrix} * & * & {}^0Z_x & {}^0P_{ix} \\ * & * & {}^0Z_y & {}^0P_{ix} \\ * & * & {}^0Z_z & {}^0P_{ix} \\ \hline 0 & 0 & 0 & 1 \end{bmatrix}$$

$${}^0T_6 = \begin{bmatrix} * & * & * & {}^0P_{6x} \\ * & * & * & {}^0P_{6y} \\ * & * & * & {}^0P_{6z} \\ \hline 0 & 0 & 0 & 1 \end{bmatrix}$$



Jacobian – Explicit Form – Linear Velocity J_v



$$y_1 = f_1(x_1, x_2, x_3, x_4, x_5, x_6)$$

$$y_2 = f_2(x_1, x_2, x_3, x_4, x_5, x_6)$$

$$\vdots$$

$$y_6 = f_6(x_1, x_2, x_3, x_4, x_5, x_6)$$

$$\delta y_1 = \frac{\partial f_1}{\partial x_1} \delta x_1 + \frac{\partial f_1}{\partial x_2} \delta x_2 + \dots + \frac{\partial f_1}{\partial x_6} \delta x_6$$

$$\delta y_2 = \frac{\partial f_2}{\partial x_1} \delta x_1 + \frac{\partial f_2}{\partial x_2} \delta x_2 + \dots + \frac{\partial f_2}{\partial x_6} \delta x_6$$

$$\vdots$$

$$\delta y_6 = \frac{\partial f_6}{\partial x_1} \delta x_1 + \frac{\partial f_6}{\partial x_2} \delta x_2 + \dots + \frac{\partial f_6}{\partial x_6} \delta x_6$$


$$Y = F(X)$$

$$\delta Y = \frac{\partial F}{\partial X} \delta X$$

$$\delta Y = \frac{\partial F}{\partial X} \delta X = J(X) \delta X$$



Jacobian – Explicit Form – Linear Velocity J_v



$$\delta y_1 = \frac{\partial f_1}{\partial x_1} \delta x_1 + \frac{\partial f_1}{\partial x_2} \delta x_2 + \dots + \frac{\partial f_1}{\partial x_6} \delta x_6$$

$$\delta y_2 = \frac{\partial f_2}{\partial x_1} \delta x_1 + \frac{\partial f_2}{\partial x_2} \delta x_2 + \dots + \frac{\partial f_2}{\partial x_6} \delta x_6$$

\vdots

$$\delta y_6 = \frac{\partial f_6}{\partial x_1} \delta x_1 + \frac{\partial f_6}{\partial x_2} \delta x_2 + \dots + \frac{\partial f_6}{\partial x_6} \delta x_6$$

$${}^0\dot{P}_{6i} = \sum_i \frac{\partial {}^0P_6}{\partial \theta_i} q_i \quad q_i = \begin{cases} \dot{\theta}_i \\ \dot{d}_i \end{cases}$$


$$J_{vi} = \frac{\partial {}^0P_6}{\partial \theta_i}$$



Jacobian Matrix

- The meaning of each column of the Jacobian matrix:

$$\begin{bmatrix} \dot{x} \\ \dot{y} \\ \dot{z} \\ \omega_x \\ \omega_y \\ \omega_z \end{bmatrix} = \begin{bmatrix} J_v(\underline{\theta}) & J_{1i} & & \\ & J_{2i} & & \\ & J_{3i} & & \\ J_\omega(\underline{\theta}) & J_{4i} & & \\ & J_{5i} & & \\ & J_{6i} & & \end{bmatrix} \begin{bmatrix} \dot{\theta}_1 \\ \dot{\theta}_2 \\ \dots \\ \dot{\theta}_N \end{bmatrix}$$

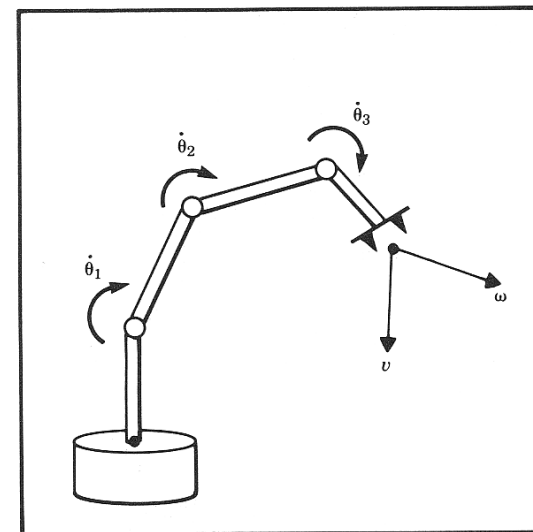



- The i 'th column maps the contribution of the angular velocity of the i 'th joint to the linear and angular velocities of the end effector along all the axis (x,y,z)



Jacobian – Explicit Form – Linear Velocity Two Cases

$$J_v \begin{bmatrix} \text{green box} \\ \text{red box} \end{bmatrix}$$

- The i 'th column of the Jacobian can be generated by holding all the joints fixed but the i 'th and actuating the i 'th at a unit velocity

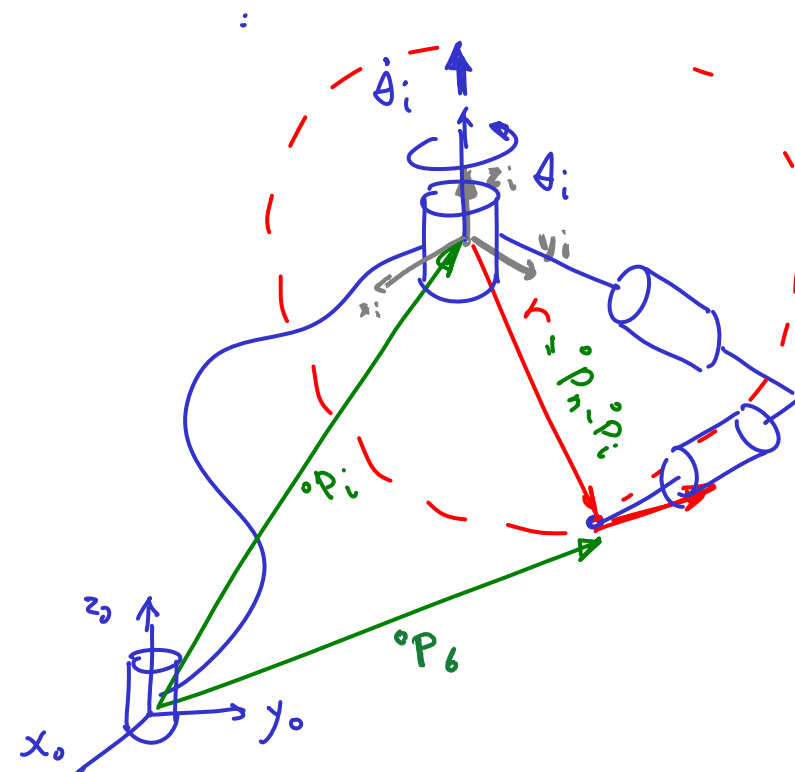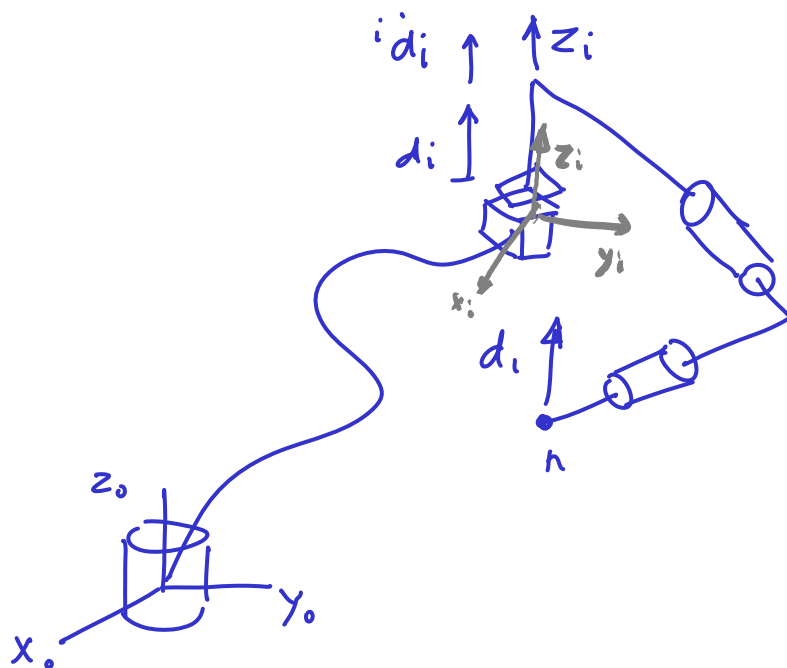



Jacobian – Explicit Form

	i	
$J_v(\underline{\theta})$	Revolute Joint $\frac{\partial {}^0P_6}{\partial \theta_i}$ — OR — ${}^0Z_i \times ({}^0P_6 - {}^0P_i)$	Prismatic Joint $\frac{\partial {}^0P_6}{\partial d_i}$ — OR — 0Z_i
$J_\omega(\underline{\theta})$	$\rho = 1$ $\rho {}^0Z_i$	$\rho = 0$


$${}^0T_i = \begin{bmatrix} * & * & {}^0Z_{ix} & {}^0P_{ix} \\ * & * & {}^0Z_{iy} & {}^0P_{iy} \\ * & * & {}^0Z_{iz} & {}^0P_{iz} \\ \hline 0 & 0 & 0 & 1 \end{bmatrix}$$

$${}^0T_6 = \begin{bmatrix} * & * & * & {}^0P_{6x} \\ * & * & * & {}^0P_{6y} \\ * & * & * & {}^0P_{6z} \\ \hline 0 & 0 & 0 & 1 \end{bmatrix}$$



Jacobian – Explicit Form – Linear Velocity Case 1 – Revolute Joint

J_v




- Freeze all DOF Except the i'th DOF (Revolute)

$$v = \omega \times r$$


$$|\theta_i| \begin{matrix} \boxed{0Z} \times \boxed{0P_6 - 0P_i} \end{matrix} = J_{vi} |\theta_i|$$

$${}^0_iT = \begin{bmatrix} * & * & \boxed{{}^0_iZ_x} & \boxed{{}^0P_{ix}} \\ * & * & \boxed{{}^0_iZ_y} & \boxed{{}^0P_{iy}} \\ * & * & \boxed{{}^0_iZ_z} & \boxed{{}^0P_{iz}} \\ 0 & 0 & 0 & 1 \end{bmatrix} \quad {}^0_6T = \begin{bmatrix} * & * & * & \boxed{{}^0P_{6x}} \\ * & * & * & \boxed{{}^0P_{6y}} \\ * & * & * & \boxed{{}^0P_{6z}} \\ 0 & 0 & 0 & 1 \end{bmatrix}$$

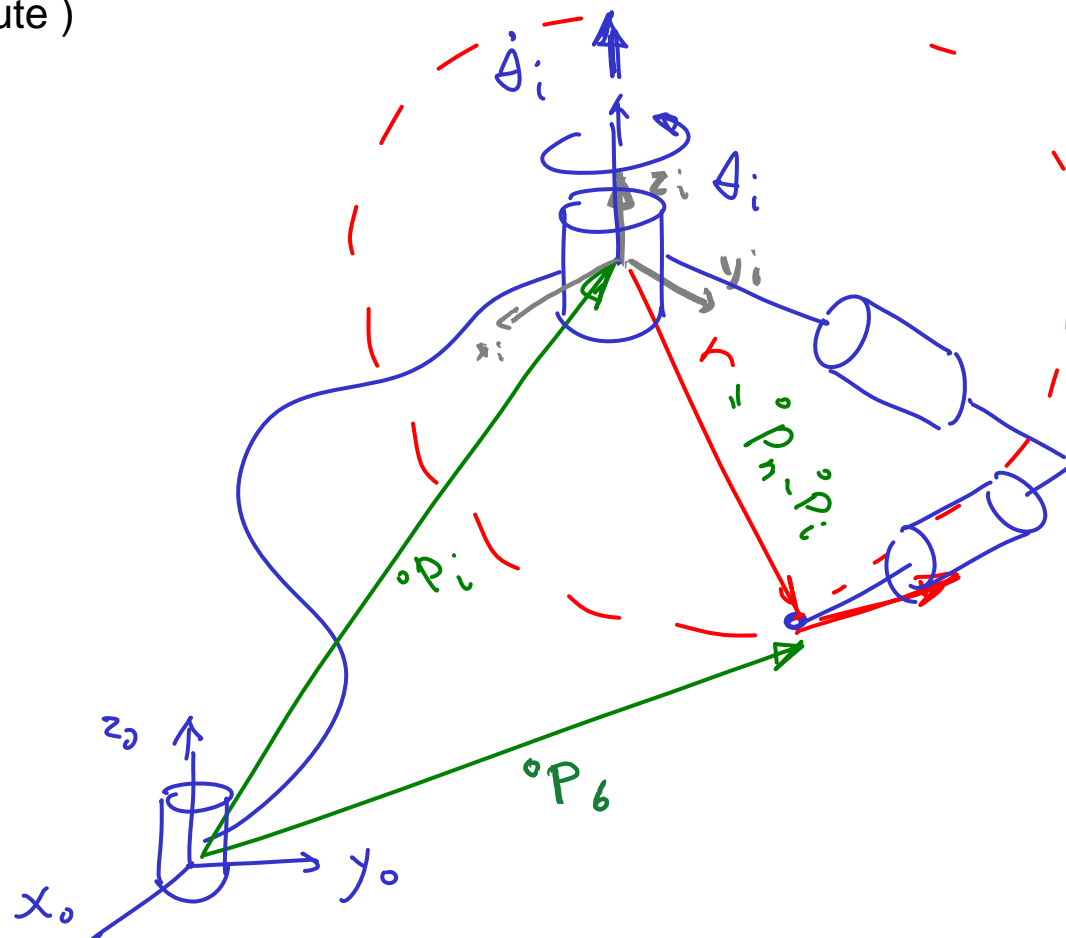



Jacobian – Explicit Form



$$\begin{bmatrix} J_v(\underline{\theta}) & \begin{matrix} \text{Revolute Joint} \\ \frac{\partial {}^0P_6}{\partial \theta_i} \\ \text{--- OR ---} \\ {}^0Z \times ({}^0P_6 - {}^0P_i) \end{matrix} & \begin{matrix} i \\ \text{---} \end{matrix} & \begin{matrix} \text{Prismatic Joint} \\ \frac{\partial {}^0P_6}{\partial d_i} \\ \text{--- OR ---} \\ {}^0Z \end{matrix} \\ \hline J_w(\underline{\theta}) & \begin{matrix} \rho = 1 \\ \rho {}^0Z \end{matrix} & \begin{matrix} \rho = 0 \end{matrix} \end{bmatrix}$$

$${}^0T_i = \begin{bmatrix} * & * & {}^0Z_x & {}^0P_{ix} \\ * & * & {}^0Z_y & {}^0P_{ix} \\ * & * & {}^0Z_z & {}^0P_{ix} \\ \hline 0 & 0 & 0 & 1 \end{bmatrix}$$

$${}^0T_6 = \begin{bmatrix} * & * & * & {}^0P_{6x} \\ * & * & * & {}^0P_{6y} \\ * & * & * & {}^0P_{6z} \\ \hline 0 & 0 & 0 & 1 \end{bmatrix}$$




Jacobian – Explicit Form – Linear Velocity Case 2- Prismatic Joint

J_v

- Freeze all DOF Except the i'th DOF (Prismatic)

$${}^0\dot{P}_i = \left| \dot{d}_i \right| {}^0R \begin{bmatrix} 0 \\ 0 \\ 1 \end{bmatrix} = \left| \dot{d}_i \right| \begin{bmatrix} {}^0Z_x \\ {}^0Z_y \\ {}^0Z_z \end{bmatrix} = \left| \dot{d}_i \right| {}^0Z$$

$${}^0T_i = \begin{bmatrix} * & * & {}^0Z_x \\ * & * & {}^0Z_y \\ * & * & {}^0Z_z \\ 0 & 0 & 0 & 1 \end{bmatrix}$$

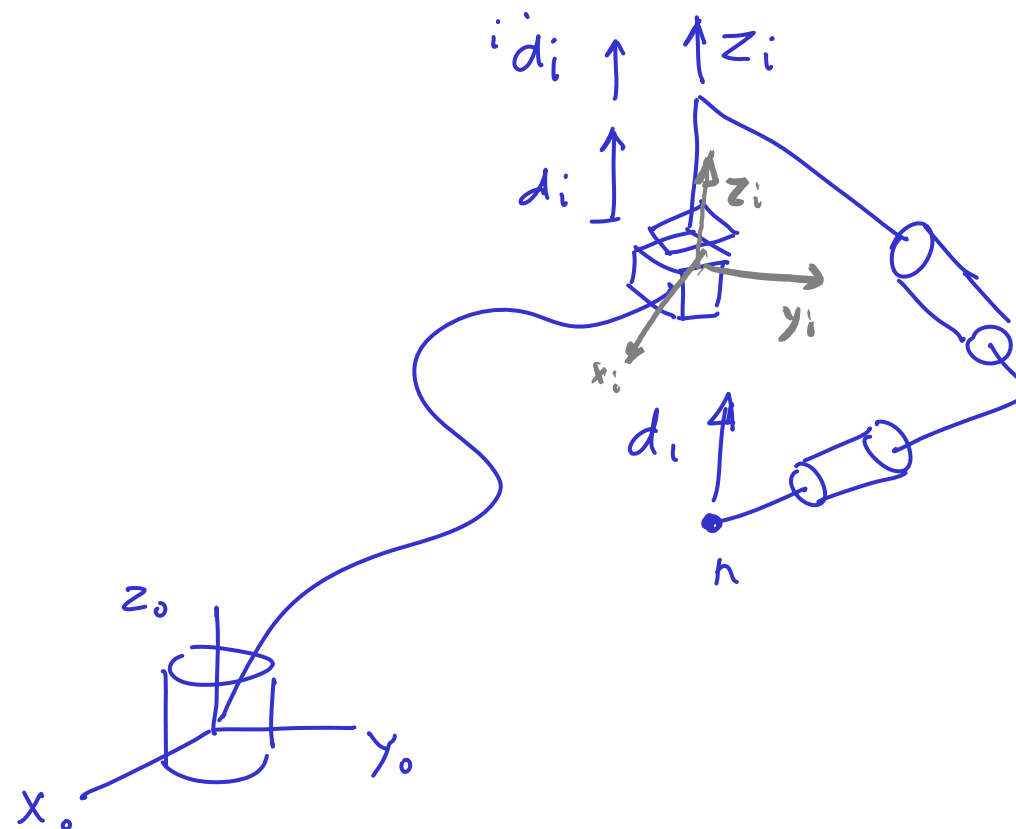




Jacobian – Explicit Form – Linear Velocity Case 2- Prismatic Joint

J_v

- All the joints are fixed except a single prismatic joint.
- The i 'th prismatic joint generates pure translation of the end effector
- The direction of the translation is parallel to the axis Z_i


$${}^0\dot{P}_i = \left| \dot{d}_i \right|_i {}^0R \begin{bmatrix} 0 \\ 0 \\ 1 \end{bmatrix} = \left| \dot{d}_i \right| \begin{bmatrix} {}^0Z_x \\ {}^0Z_y \\ {}^0Z_z \end{bmatrix} = \left| \dot{d}_i \right| {}^0Z$$

$${}^0T_i = \begin{bmatrix} * & * & {}^0Z_x \\ * & * & {}^0Z_y \\ * & * & {}^0Z_z \\ 0 & 0 & 0 & 1 \end{bmatrix}$$

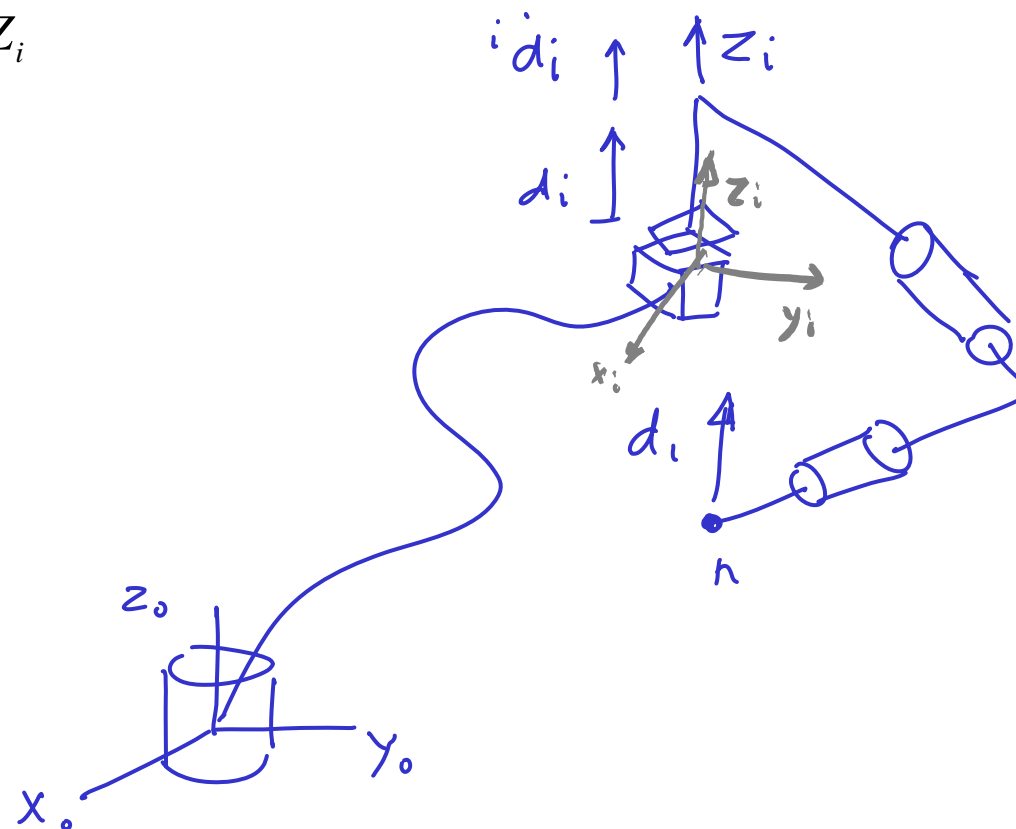



Jacobian – Explicit Form



$$\begin{bmatrix} J_v(\underline{\theta}) & \begin{matrix} \text{Revolute Joint} \\ \frac{\partial {}^0P_6}{\partial \theta_i} \\ \text{--- OR ---} \\ {}^0Z \times ({}^0P_6 - {}^0P_i) \end{matrix} & \begin{matrix} \text{Prismatic Joint} \\ \frac{\partial {}^0P_6}{\partial d_i} \\ \text{--- OR ---} \\ {}^0Z \end{matrix} \\ J_\omega(\underline{\theta}) & \begin{matrix} \rho = 1 \\ \rho {}^0Z \end{matrix} & \begin{matrix} \rho = 0 \end{matrix} \end{bmatrix}$$


$${}^0T_i = \left[\begin{array}{ccc|c} * & * & {}^0Z_x & {}^0P_{ix} \\ * & * & {}^0Z_y & {}^0P_{ix} \\ * & * & {}^0Z_z & {}^0P_{ix} \\ \hline 0 & 0 & 0 & 1 \end{array} \right]$$

$${}^0T_6 = \left[\begin{array}{ccc|c} * & * & * & {}^0P_{6x} \\ * & * & * & {}^0P_{6y} \\ * & * & * & {}^0P_{6z} \\ \hline 0 & 0 & 0 & 1 \end{array} \right]$$



Jacobian – Explicit Form – Linear Velocity Derivative

J_v



- The linear velocity of the end effector is ${}^0\dot{P}_n$. By the chain rule for differentiation

$${}^0\dot{P}_n = \sum_i^n \frac{\partial {}^0P_n}{\partial q_i} q_i$$

- Where q_i is the generalized notation for both the angle (revolute joint) and displacement (prismatic joint)

$$q_i = \begin{cases} \theta_i \\ d_i \end{cases}$$


- Thus the i'th column of $J_v(\underline{\theta})$ which denoted as J_{vi} is given by

$$\frac{\partial {}^0P_n}{\partial q_i}$$

- This expression is just the linear velocity of the end effector that would result if $q_i = 1$ and all the others $q_j = 0$



Jacobian – Explicit Form




		i	
$J_v(\underline{\theta})$	Revolute Joint	<div></div>	Prismatic Joint
	$\frac{\partial {}^0P_6}{\partial \theta_i}$ <p>— OR —</p> ${}^0Z_i \times ({}^0P_6 - {}^0P_i)$		$\frac{\partial {}^0P_6}{\partial d_i}$ <p>— OR —</p> ${}^0Z_i R \hat{\rho}_i \dot{\theta}_i$
$J_\omega(\underline{\theta})$		<div></div>	
	$\rho = 1$	$\rho {}^0Z_i$	$\rho = 0$

$${}^0T_i = \left[\begin{array}{ccc|c} * & * & {}^0Z_{ix} & {}^0P_{ix} \\ * & * & {}^0Z_{iy} & {}^0P_{ix} \\ * & * & {}^0Z_{iz} & {}^0P_{ix} \\ \hline 0 & 0 & 0 & 1 \end{array} \right]$$

$${}^0T_6 = \left[\begin{array}{ccc|c} * & * & * & {}^0P_{6x} \\ * & * & * & {}^0P_{6y} \\ * & * & * & {}^0P_{6z} \\ \hline 0 & 0 & 0 & 1 \end{array} \right]$$



Jacobian – Explicit Form – Angular Velocity J_ω



$${}^{i+1}\omega_{i+1} = {}^{i+1}_i R^i \omega_i + \rho \begin{bmatrix} 0 \\ 0 \\ \dot{\theta}_{i+1} \end{bmatrix}$$

For $i=0$

$${}^1\omega_1 = {}^1_0 R^0 \omega_0 + \rho_1 \begin{bmatrix} 0 \\ 0 \\ \dot{\theta}_1 \end{bmatrix}$$

For $i=1$


$${}^2\omega_2 = {}^2_1 R^1 \omega_1 + \rho_2 \begin{bmatrix} 0 \\ 0 \\ \dot{\theta}_2 \end{bmatrix} = {}^2_1 R \rho_1 \begin{bmatrix} 0 \\ 0 \\ \dot{\theta}_1 \end{bmatrix} + \rho_2 \begin{bmatrix} 0 \\ 0 \\ \dot{\theta}_2 \end{bmatrix}$$

For $i=2$

$${}^3\omega_3 = {}^3_2 R^2 \omega_2 + \rho_3 \begin{bmatrix} 0 \\ 0 \\ \dot{\theta}_3 \end{bmatrix} = {}^3_2 R \left[{}^2_1 R \rho_1 \begin{bmatrix} 0 \\ 0 \\ \dot{\theta}_1 \end{bmatrix} + \rho_2 \begin{bmatrix} 0 \\ 0 \\ \dot{\theta}_2 \end{bmatrix} \right] + \rho_3 \begin{bmatrix} 0 \\ 0 \\ \dot{\theta}_3 \end{bmatrix} = {}^3_1 R \rho_1 \begin{bmatrix} 0 \\ 0 \\ \dot{\theta}_1 \end{bmatrix} + {}^3_2 R \rho_2 \begin{bmatrix} 0 \\ 0 \\ \dot{\theta}_2 \end{bmatrix} + \rho_3 \begin{bmatrix} 0 \\ 0 \\ \dot{\theta}_3 \end{bmatrix}$$



Jacobian – Explicit Form – Angular Velocity J_ω



$${}^{i+1}\omega_{i+1} = {}^{i+1}R^i \omega_i + \rho \begin{bmatrix} 0 \\ 0 \\ \dot{\theta}_{i+1} \end{bmatrix}$$

For $i=n-1$

$${}^n\omega_n = {}^nR^{n-1}\omega_{n-1} + \rho_n \begin{bmatrix} 0 \\ 0 \\ \dot{\theta}_3 \end{bmatrix} = {}^nR\rho_1 \begin{bmatrix} 0 \\ 0 \\ \dot{\theta}_1 \end{bmatrix} + {}^nR\rho_2 \begin{bmatrix} 0 \\ 0 \\ \dot{\theta}_2 \end{bmatrix} + {}^nR\rho_3 \begin{bmatrix} 0 \\ 0 \\ \dot{\theta}_3 \end{bmatrix} + \cdots + \cancel{{}^nR\rho_n \begin{bmatrix} 0 \\ 0 \\ \dot{\theta}_n \end{bmatrix}}$$


\swarrow \mathbf{I}

- Multiply both side of the equations by 0R_n

$${}^0R_n \omega_n = {}^0R_n \left[{}^nR^{n-1}\omega_{n-1} + \rho_n \begin{bmatrix} 0 \\ 0 \\ \dot{\theta}_3 \end{bmatrix} \right] = {}^0R_n {}^nR\rho_1 \begin{bmatrix} 0 \\ 0 \\ \dot{\theta}_1 \end{bmatrix} + {}^0R_n {}^nR\rho_2 \begin{bmatrix} 0 \\ 0 \\ \dot{\theta}_2 \end{bmatrix} + {}^0R_n {}^nR\rho_3 \begin{bmatrix} 0 \\ 0 \\ \dot{\theta}_3 \end{bmatrix} + \cdots + {}^0R_n {}^nR\rho_n \begin{bmatrix} 0 \\ 0 \\ \dot{\theta}_n \end{bmatrix}$$



Jacobian – Explicit Form – Angular Velocity J_ω




$${}^0_n R^n \omega_n = {}^0_n R \left[{}^n_{n-1} R^{n-1} \omega_{n-1} + \rho_n \begin{bmatrix} 0 \\ 0 \\ \dot{\theta}_3 \end{bmatrix} \right] = {}^0_n R {}^n_1 R \rho_1 \begin{bmatrix} 0 \\ 0 \\ \dot{\theta}_1 \end{bmatrix} + {}^0_n R {}^n_2 R \rho_2 \begin{bmatrix} 0 \\ 0 \\ \dot{\theta}_2 \end{bmatrix} + {}^0_n R {}^n_3 R \rho_3 \begin{bmatrix} 0 \\ 0 \\ \dot{\theta}_3 \end{bmatrix} + \dots + {}^0_n R {}^n_n R \rho_n \begin{bmatrix} 0 \\ 0 \\ \dot{\theta}_n \end{bmatrix}$$

$${}^0 \omega_n = \dots = {}^0_1 R \rho_1 \begin{bmatrix} 0 \\ 0 \\ \dot{\theta}_1 \end{bmatrix} + {}^0_2 R \rho_2 \begin{bmatrix} 0 \\ 0 \\ \dot{\theta}_2 \end{bmatrix} + {}^0_3 R \rho_3 \begin{bmatrix} 0 \\ 0 \\ \dot{\theta}_3 \end{bmatrix} + \dots + {}^0_n R \rho_n \begin{bmatrix} 0 \\ 0 \\ \dot{\theta}_n \end{bmatrix}$$

$${}^0 \omega_n = \sum_{i=1}^n {}^0_i R \rho_i \begin{bmatrix} 0 \\ 0 \\ \dot{\theta}_i \end{bmatrix} = \sum_{i=1}^n {}^0_i R \hat{k} \rho_i \dot{\theta}_i = \sum_{i=1}^n {}^0_i Z \rho_i \dot{\theta}_i$$



Jacobian – Explicit Form – Angular Velocity J_{ω}




$$\begin{bmatrix} J_v(\underline{\theta}) \\ J_{\omega}(\underline{\theta}) \end{bmatrix}$$

$$\begin{bmatrix} \rho_{11}^0 Z & \rho_{22}^0 Z & \dots & \rho_{n-1\ n-1}^0 Z & \rho_{nn}^0 Z \end{bmatrix}$$



Jacobian – Explicit Form – Angular Velocity J_{ω}

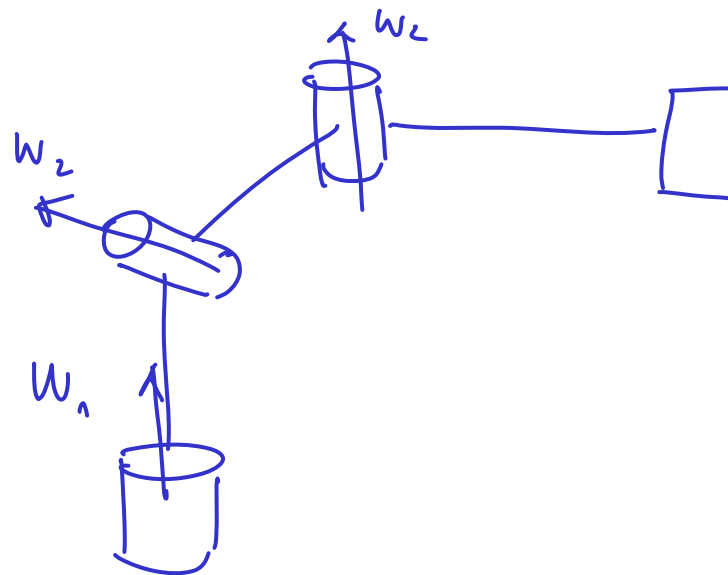



Jacobian Methods of Derivation & the Corresponding Reference Frame – Summary

Method	Jacobian Matrix Reference Frame	Transformation to Base Frame (Frame 0)
Explicit (Diff. the Forward Kinematic Eq.)	${}^0 J_N$	None
Iterative Velocity Eq.	${}^N J_N$	Transform Method 1: ${}^0 v_N = {}^0 R^N v_N$ ${}^0 \omega_N = {}^0 R^N \omega_N$ Transform Method 2: ${}^0 J_N(\theta) = \begin{bmatrix} {}^0 R^N & 0 \\ 0 & {}^0 R^N \end{bmatrix} {}^N J_N(\theta)$
Iterative Force Eq.	${}^N J_N^T$	Transpose ${}^N J_N = [{}^N J_N^T]^T$ Transform ${}^0 J_N(\theta) = \begin{bmatrix} {}^0 R^N & 0 \\ 0 & {}^0 R^N \end{bmatrix} {}^N J_N(\theta)$